


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone (608) 845.6411 Fax: (608) 845.6504 carnes@carnes.com

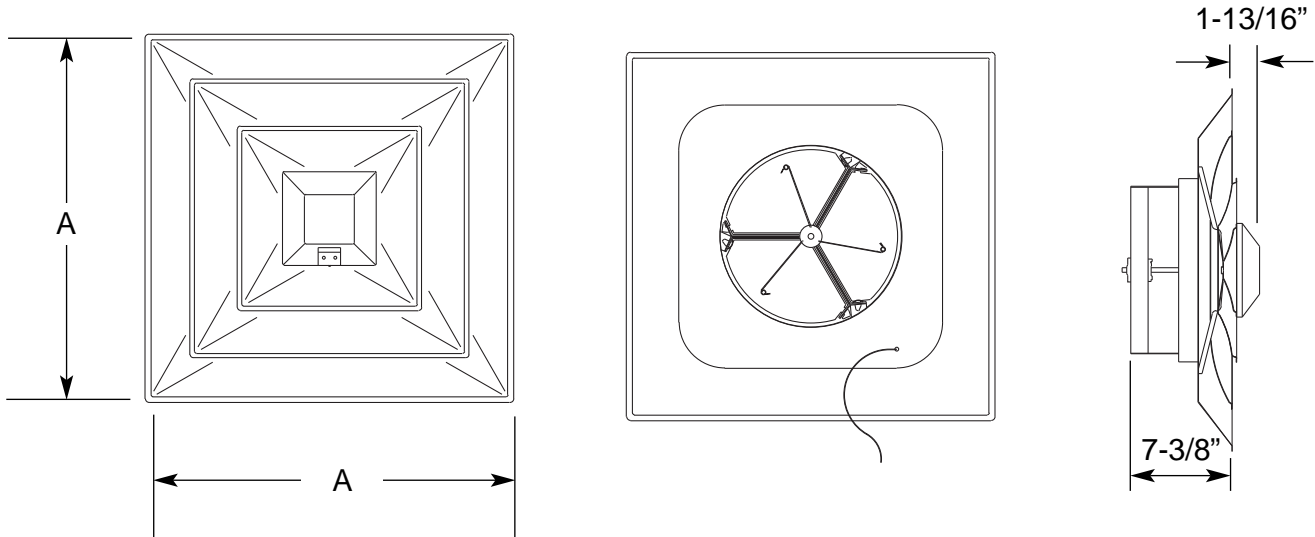

Model Number	Nominal Duct Size (Dia. In.)	A	Actual Inlet Dimension
SRAD 2406	6 (152)	23-3/4 (603)	5-7/8 (149)
SRAD 2407	7 (178)	23-3/4 (603)	6-7/8 (175)
SRAD 2408	8 (203)	23-3/4 (603)	7-7/8 (200)
SRAD 2410	10 (254)	23-3/4 (603)	9-7/8 (251)
SRAD 2412	12 (305)	23-3/4 (603)	11-7/8 (302)
SRAD 2414	14 (356)	23-3/4 (603)	13-7/8 (352)
SRAD 2416	16 (406)	23-3/4 (603)	15-7/8 (403)

NOTES:

- Stamped steel construction
- 24 x 24 lay in diffuser
- 6", 7", 8", 10", 12", 14", 16" inlet sizes available
- Remote can be hand held or wall mounted
- Remote uses radio frequencies (FCC approved), not infra-red frequencies. This allows for longer distance, more consistent control and is not affected by line of sight obstructions.
- Remote can handle up to 32 zones, with several units per zone.
- Total versatility in controlling settings. Diffusers can be controlled the following ways:
 - Separate remote for each diffuser
 - One remote to control all diffusers in one adjustment
 - One remote to control diffusers individually
- Uses 24 volt AC from step down transformer. Optional 120/240 volt or 277 volt step down transformer is available. One transformer can handle up to six diffusers.
- In the event of a power outage, the programming chips will retain all data.
- Standard finish is electrocoat acrylic baked enamel. Standard color is #11 Carnes bright white.