


45° Fixed Deflection Return Grilles & Registers

Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

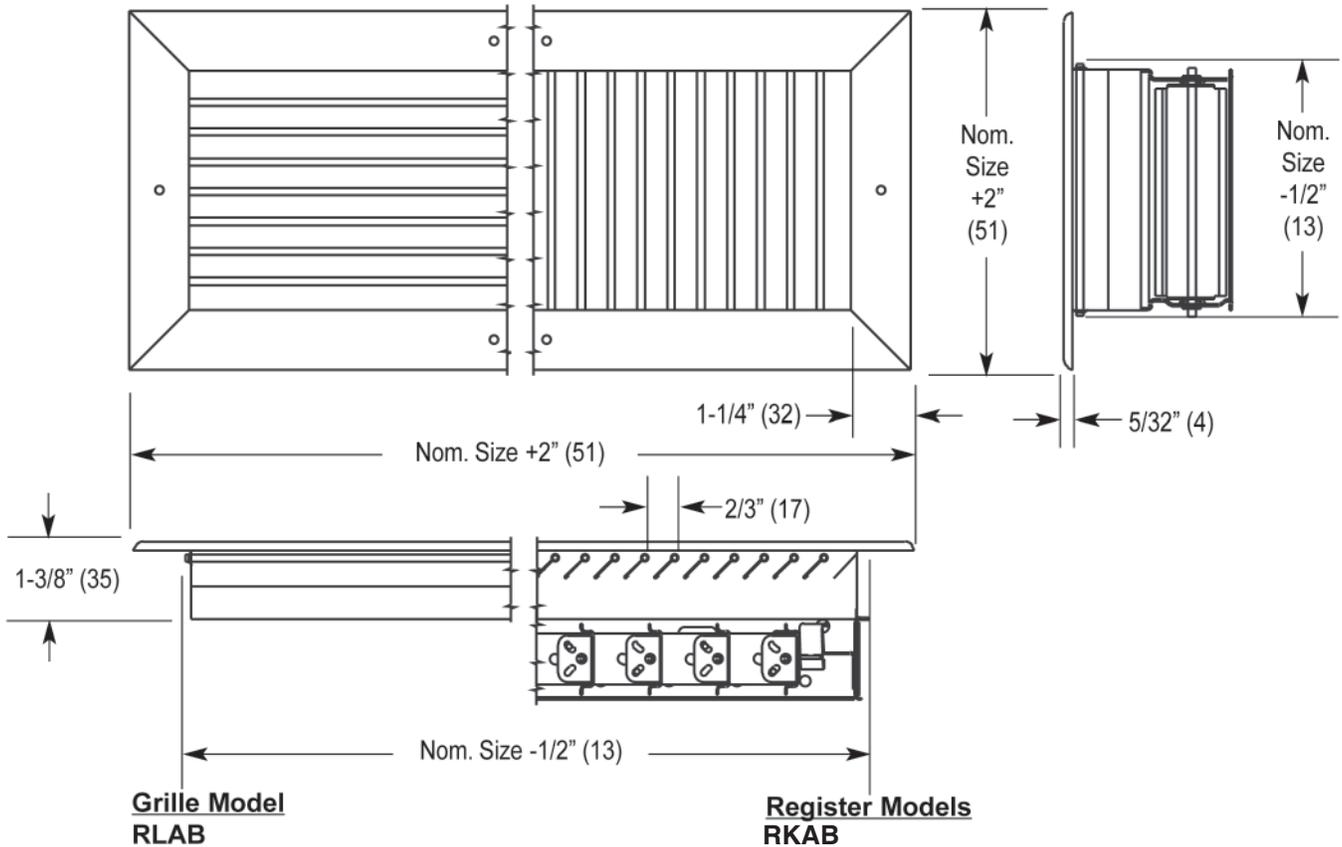

Notes:

- Standard screws are #6 x 1-1/4" (32) phillips trusshead screws.
- Polyurethane foam gasket around edge of frame is available on request.
- The standard finish is #22 Satin Polish with one coat of clear lacquer. Other finishes available on request.
- Blades can be aligned either horizontally or vertically, and are fixed at 45° deflection.
- Center mullion is used for blade lengths exceeding 24" (610) nominal size in either dimension.
- Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
- This product is covered by U.S. Patent #5,771,647.
- Grille construction is type 304 stainless steel.
- Damper construction on Model RKAB is all 304 stainless steel.
- The standard operator on the damper takes a medium size flat-blade screwdriver.
- Maximum size shown is the maximum single panel size. Panels can be joined for larger sizes.
- Metric dimensions are given in millimeters.

Model	Construction	Damper	Blade Alignment	Minimum W x H	Maximum W x H
RLABH	Stainless Steel	No	Horizontal	4" x 4" (102 x 102)	36" x 36" (914 x 914)
RLABV		No	Vertical		
RKABH	Stainless Steel	Stainless Steel	Horizontal	4" x 4" (102 x 102)	36" x 36" (914 x 914)
RKABV		Stainless Steel	Vertical		