


**Imperial [IP] Dimensions**  
**Metric (SI) in Parentheses**

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

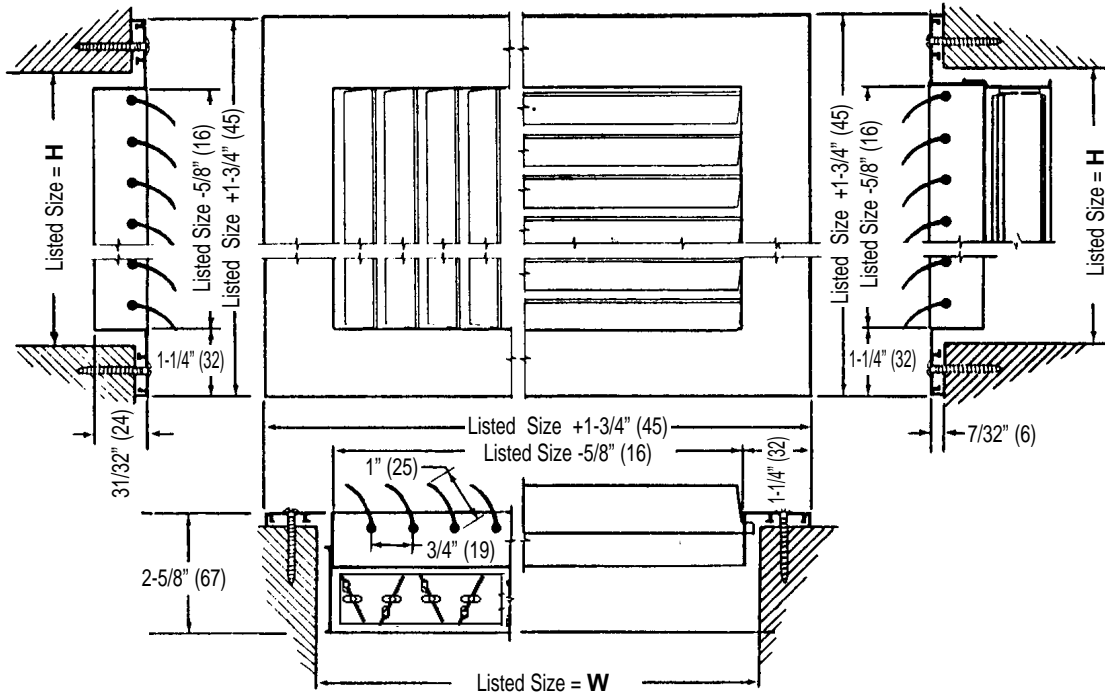

**NOTES:**

- Standard screws are #6 x 1-1/4" (32) phillips countersunk screws.
- Standard color is Carnes Bright White or Natural Anodized. Other colors are available on request.
- Blades can be aligned either horizontally or vertically, and are individually adjustable.
- Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
- Aluminum damper is model RXFM opposed blade damper.
- The standard operator on the damper takes a medium size flat-blade screwdriver.
- Metric dimensions are given in millimeters.

DIMENSIONS LISTED IN INCHES (In Millimeters)				
Model	Damper	Front Direction	Available Sizes*	
			Minimum W x H	Maximum W x H
RACMH	NA	Horizontal	6x4 (152x102)	36x36 (914x914)
RACMV	NA	Vertical	6x4 (152x102)	36x36 (914x914)
RNCMH	Aluminum	Horizontal	6x4 (152x102)	36x36 (914x914)
RNCMV	Aluminum	Vertical	6x4 (152x102)	36x36 (914x914)

