


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6470 www.carnes.com

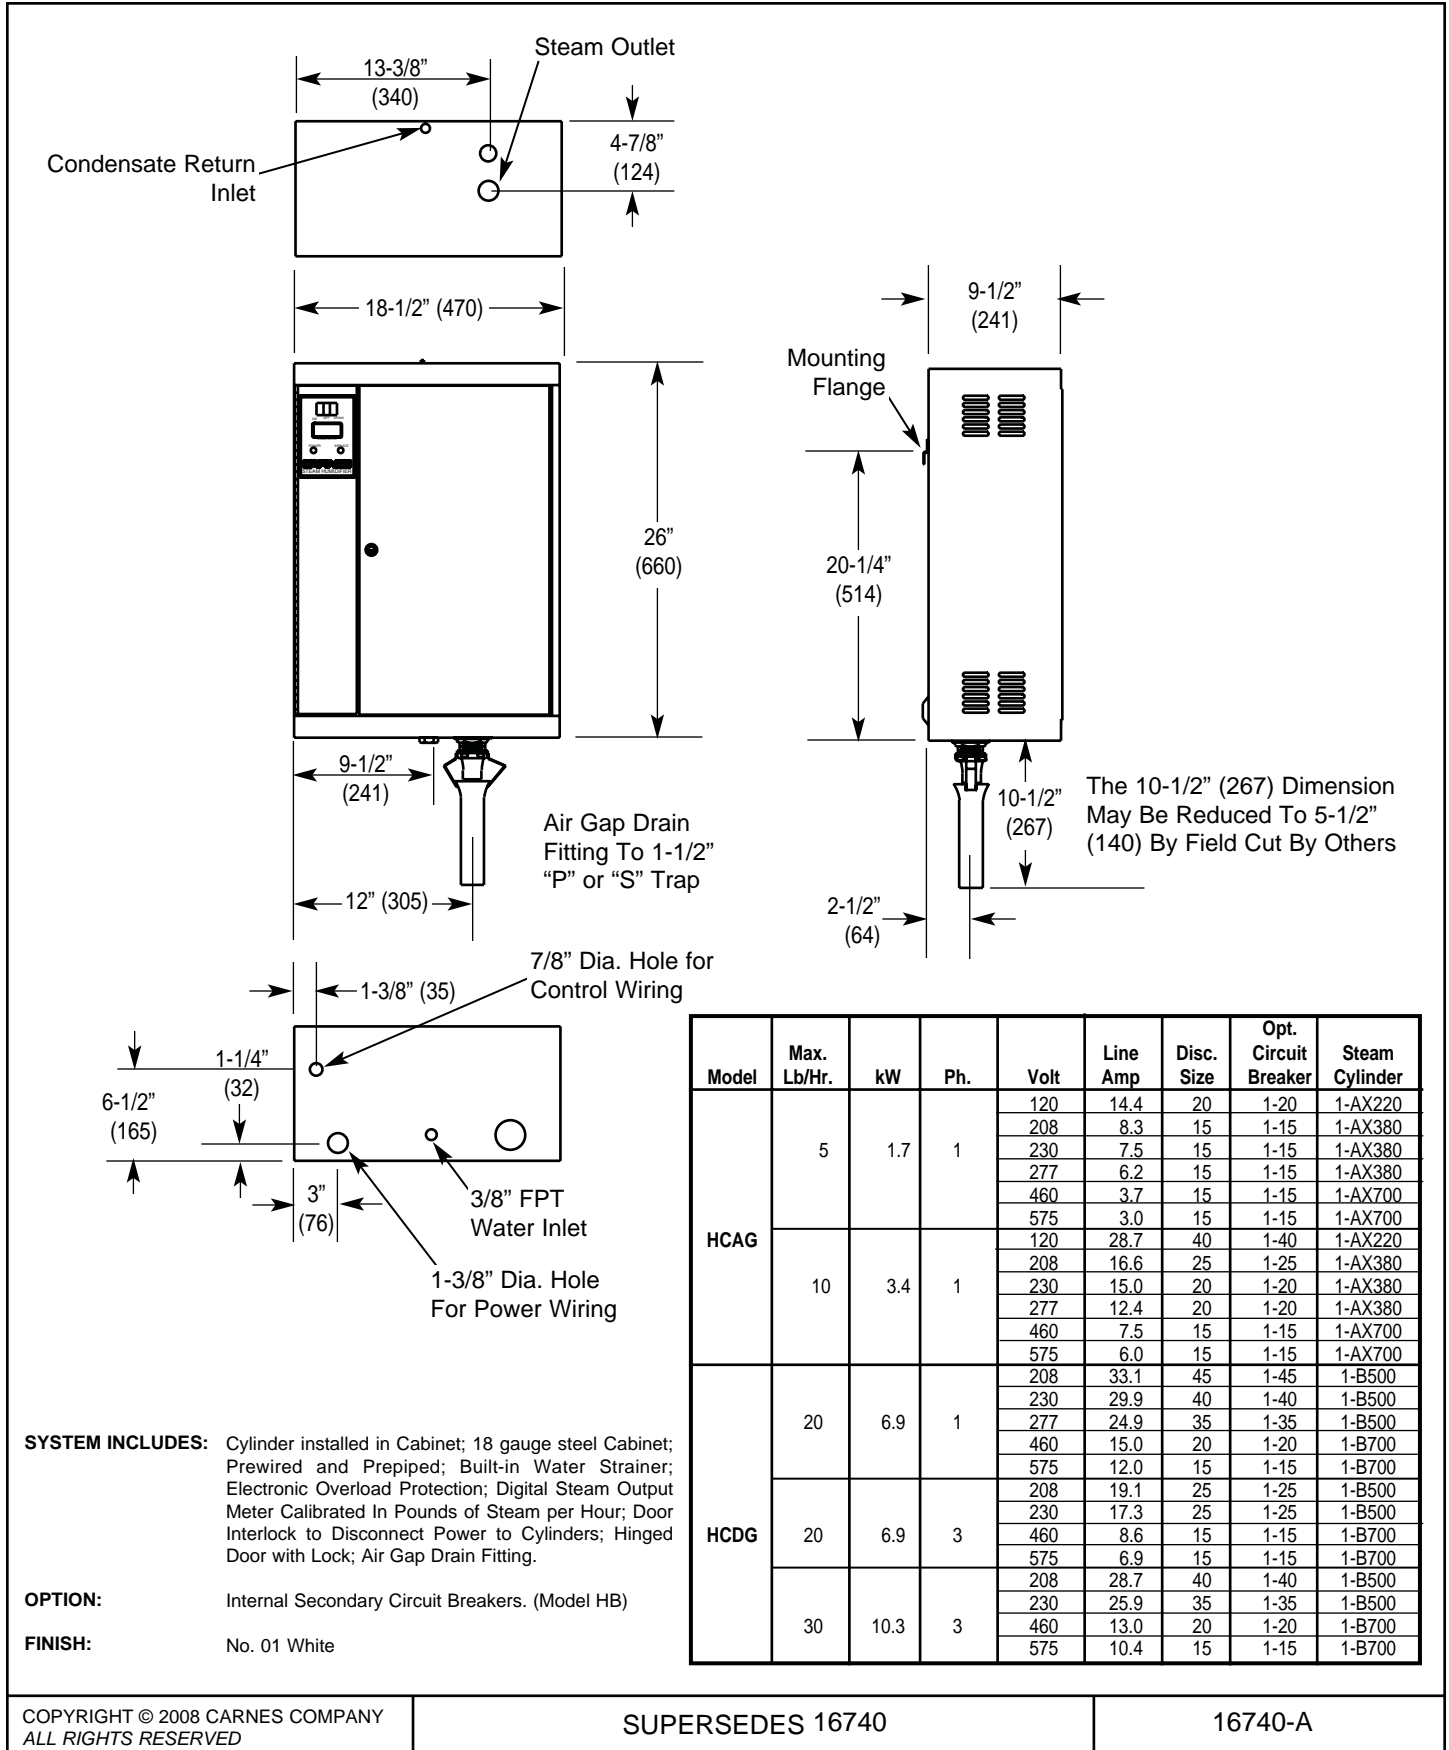

SYSTEM INCLUDES: Cylinder installed in Cabinet; 18 gauge steel Cabinet; Prewired and Prepiped; Built-in Water Strainer; Electronic Overload Protection; Digital Steam Output Meter Calibrated In Pounds of Steam per Hour; Door Interlock to Disconnect Power to Cylinders; Hinged Door with Lock; Air Gap Drain Fitting.

OPTION: Internal Secondary Circuit Breakers. (Model HB)

FINISH: No. 01 White

Model	Max. Lb/Hr.	kW	Ph.	Volt	Line Amp	Disc. Size	Opt. Circuit Breaker	Steam Cylinder
HCAG	5	1.7	1	120	14.4	20	1-20	1-AX220
				208	8.3	15	1-15	1-AX380
				230	7.5	15	1-15	1-AX380
				277	6.2	15	1-15	1-AX380
				460	3.7	15	1-15	1-AX700
				575	3.0	15	1-15	1-AX700
HCAG	10	3.4	1	120	28.7	40	1-40	1-AX220
				208	16.6	25	1-25	1-AX380
				230	15.0	20	1-20	1-AX380
				277	12.4	20	1-20	1-AX380
				460	7.5	15	1-15	1-AX700
				575	6.0	15	1-15	1-AX700
HCDG	20	6.9	1	208	33.1	45	1-45	1-B500
				230	29.9	40	1-40	1-B500
				277	24.9	35	1-35	1-B500
	20	6.9	3	460	15.0	20	1-20	1-B700
				575	12.0	15	1-15	1-B700
				208	19.1	25	1-25	1-B500
30	10.3	3	230	17.3	25	1-25	1-B500	
			460	8.6	15	1-15	1-B700	
			575	6.9	15	1-15	1-B700	
			208	28.7	40	1-40	1-B500	
30	10.3	3	230	25.9	35	1-35	1-B500	
			460	13.0	20	1-20	1-B700	
			575	10.4	15	1-15	1-B700	