


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6470 www.carnes.com

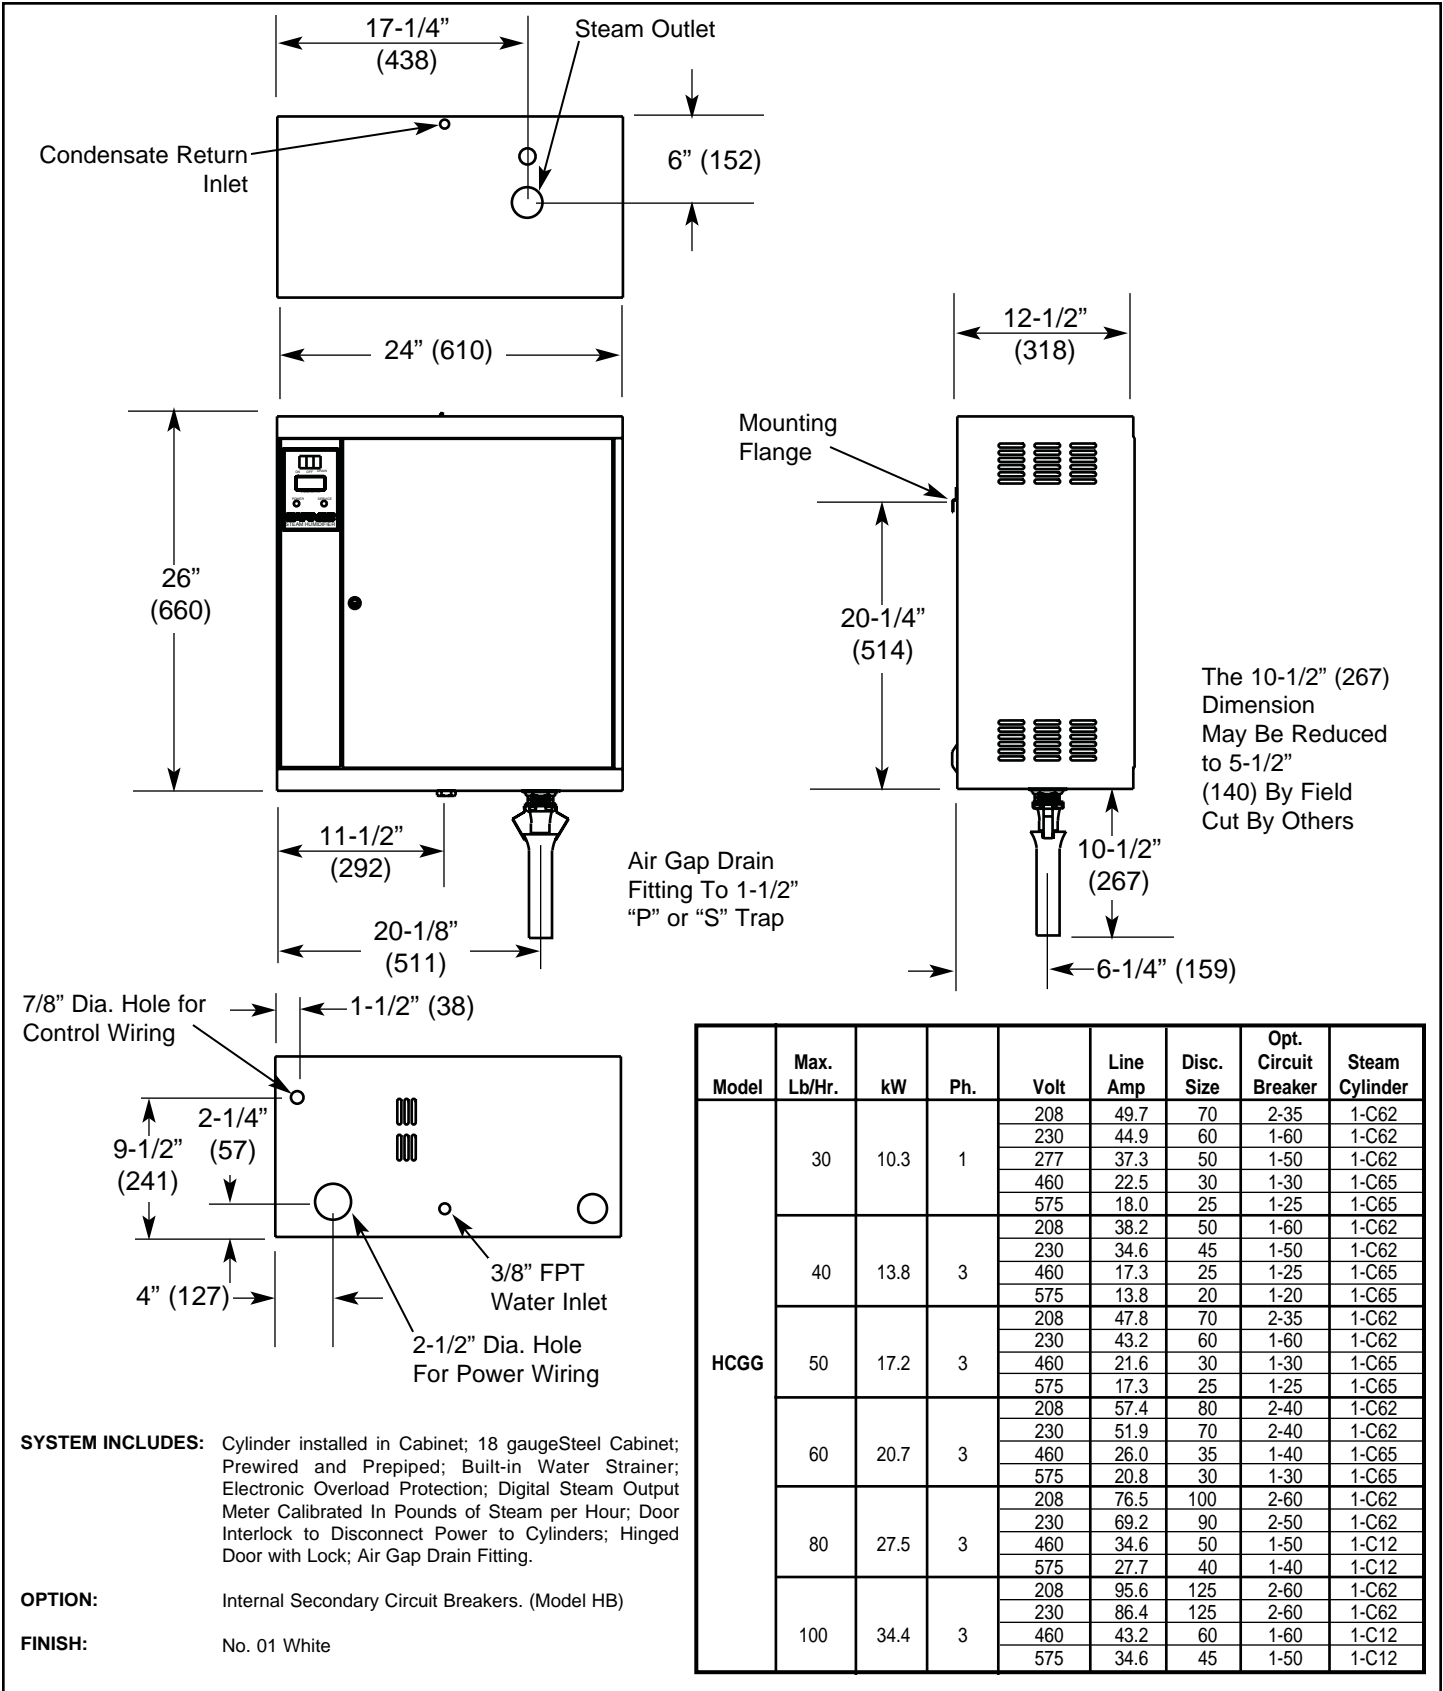

SYSTEM INCLUDES: Cylinder installed in Cabinet; 18 gauge Steel Cabinet; Prewired and Prepped; Built-in Water Strainer; Electronic Overload Protection; Digital Steam Output Meter Calibrated In Pounds of Steam per Hour; Door Interlock to Disconnect Power to Cylinders; Hinged Door with Lock; Air Gap Drain Fitting.

OPTION: Internal Secondary Circuit Breakers. (Model HB)

FINISH: No. 01 White

Model	Max. Lb/Hr.	kW	Ph.	Volt	Line Amp	Disc. Size	Opt. Circuit Breaker	Steam Cylinder
HCGG	30	10.3	1	208	49.7	70	2-35	1-C62
				230	44.9	60	1-60	1-C62
				277	37.3	50	1-50	1-C62
				460	22.5	30	1-30	1-C65
	40	13.8	3	575	18.0	25	1-25	1-C65
				208	38.2	50	1-60	1-C62
				230	34.6	45	1-50	1-C62
				460	17.3	25	1-25	1-C65
	50	17.2	3	575	13.8	20	1-20	1-C65
				208	47.8	70	2-35	1-C62
				230	43.2	60	1-60	1-C62
				460	21.6	30	1-30	1-C65
60	20.7	3	575	17.3	25	1-25	1-C65	
			208	57.4	80	2-40	1-C62	
			230	51.9	70	2-40	1-C62	
			460	26.0	35	1-40	1-C65	
80	27.5	3	575	20.8	30	1-30	1-C65	
			208	76.5	100	2-60	1-C62	
			230	69.2	90	2-50	1-C62	
			460	34.6	50	1-50	1-C12	
100	34.4	3	575	27.7	40	1-40	1-C12	
			208	95.6	125	2-60	1-C62	
			230	86.4	125	2-60	1-C62	
			460	43.2	60	1-60	1-C12	
				575	34.6	45	1-50	1-C12