



LEFT HAND UNIT SHOWN RIGHT HAND AVAILABLE

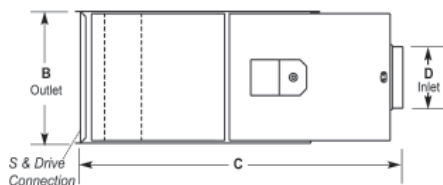

FOR LARGER IMAGES AND DIMENSIONS,
REFER TO SPECIFICATION/CUT SHEET.

STANDARD FEATURES:

- Right Hand Controls Arrangement
- 22 Gauge Galvanized Steel
- AHRI Certified
- Patented Tri-Averaging Inlet Sensor
- Insulated Inlet Collar
- Calibration Chart Located On Inlet

- Slip & Drive Discharge Connection
- 3/8" Damper Shaft With Position Indicator Rotating In Bronze Bearings
- Valaro Type "A" Gasketed Damper Blade
- Made In America
- Door Interlock Disconnect Switch
- 24 Volt Transformer

OPTIONS:

Insulation

- ☐ 1/2" Matte Faced
- ☐ 1" Matte Faced
- ☐ 1/2" Foil Faced
- ☐ 1" Foil Faced
- ☐ 1/2" Closed Cell Foam
- ☐ Dual Wall With Solid Liner
- ☐ Dual Wall With Perforated Liner
- ☐ 1" Foil Faced Duct Board (Internal)
- ☐ 1" Foil Faced Duct Board (External)
- ☐ No Insulation

Controls

- ☐ NEMA Controls Enclosure Only (Controls By Others)
- ☐ Controls Supplied By Others, Mounted By Factory
- ☐ Factory Supplied Analog Controls With Wall T'Stat
- ☐ Factory Supplied Electric Controls With Wall T'Stat
- ☐ Left Hand Controls

Heater

- ☐ Factory Mounted-Staged/Stepped
- ☐ Factory Mounted-SCR
- ☐ Circuit Fusing

Miscellaneous

- ☐ Hanger Brackets
- ☐ Side Access Panel

- ☐ Special Construction _____
- ☐ Exceptions _____

DIMENSIONS LISTED IN INCHES (Millimeters)							
Unit Size	CFM (L/s) Range	OUTLET		C	INLET		F
		A	B		D	E	
05	0-350 (0-165)	12 (305)	8 (203)	44-3/8 (1127)	4-7/8 (124)	18-1/2 (470)	8-1/8 (206)
06	0-500 (0-236)	12 (305)	8 (203)	44-3/8 (1127)	5-7/8 (149)	18-1/2 (470)	8-1/8 (206)
07	0-700 (0-330)	12 (305)	10 (254)	44-3/8 (1127)	6-7/8 (175)	18-1/2 (470)	10-1/8 (257)
08	0-1000 (0-472)	12 (305)	10 (254)	44-3/8 (1127)	7-7/8 (200)	18-1/2 (470)	10-1/8 (257)
10	0-1500 (0-708)	14 (356)	12-1/2 (318)	44-3/8 (1127)	9-7/8 (251)	20-1/2 (521)	12-5/8 (320)
12	0-2300 (0-1085)	16 (406)	15 (381)	44-3/8 (1127)	11-7/8 (302)	22-1/2 (572)	15-1/8 (381)
14	0-3100 (0-1463)	20 (508)	17-1/2 (445)	44-3/8 (1127)	13-7/8 (352)	26-1/2 (673)	17-5/8 (448)
16	0-4200 (0-1982)	24 (610)	18 (457)	44-3/8 (1127)	15-7/8 (403)	30-1/2 (775)	18-1/8 (460)
18	0-5500 (0-2596)	32 (813)	17-1/2 (445)	44-3/8 (1127)	15-7/8x17-7/8 (403x454)	38-1/2 (978)	17-5/8 (448)
24	0-7300 (0-3445)	32 (813)	17-1/2 (445)	44-3/8 (1127)	15-7/8x23-7/8 (403x607)	38-1/2 (978)	17-5/8 (448)

Job Name _____
Architect _____
Engineer _____

Contractor _____
Submitted By _____
Tag/Mark _____